



## OVERALL DIMENSIONS



## ORDERING EXAMPLE

For Example **1** **K** **H** **1** **N** **□** **□**  
 SERIES TYPE FLANGE SHAFT PORT DISPL. ROTATION


If you need pump with displ.0.19 c.i.r and rotation is cw, the model number is: **1KH1N03R**

## PERFORMANCE DATA

MODEL	DISPLACEMENT		PRESSURE		RPM RANGE	DIMENSIONS		WEIGHT	
	c.i.r	cm <sup>3</sup> /r	CONTINUOUS	MAX.		L	Kg	LBS	
05	0.05	0.8	3000(21)	3600(25)	600	2.854(72.5)	0.68	1.49	
01	0.06	1.1	3000(21)	3600(25)		2.893(73.5)	0.69	1.52	
13	0.08	1.3	3000(21)	3600(25)		2.932(74.5)	0.70	1.53	
16	0.10	1.6	3000(21)	3600(25)	4000	2.972(75.5)	0.71	1.55	
02	0.13	2.1	3000(21)	3600(25)		3.050(77.5)	0.74	1.62	
26	0.16	2.6	3000(21)	3600(25)		3.129(79.5)	0.76	1.66	
03	0.19	3.2	3000(21)	3600(25)	600	3.208(81.5)	0.79	1.73	
37	0.22	3.7	3000(21)	3600(25)		3.287(83.5)	0.81	1.77	
04	0.25	4.2	2550(18)	3000(21)		3.365(85.5)	0.83	1.82	
05	0.29	4.8	2550(18)	3000(21)	(*2500)	3.444(87.5)	0.87	1.90	
06	0.35	5.8	1980(14)	2300(16)		3.602(91.5)	0.92	2.01	
07	0.48	7.9	1980(14)	2300(16)		3.916(99.5)	1.00	2.19	
09	0.54	8.8	1980(14)	2300(16)		4.074(103.5)	1.05	2.30	

\*More than 2500 qualified per applications.

## MOUNTING FLANGES

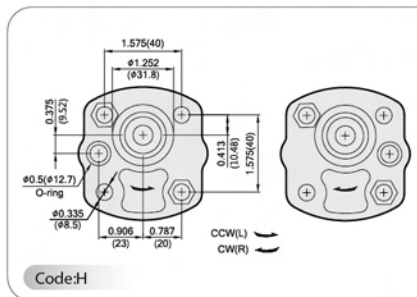

## DRIVE SHAFTS

